

ASIX EUROPEAN PROFILE CYLINDERS



MAIN FEATURES

ACTIVE SECURITY

- **NUMBER OF KEY-DIFFERS:** over 30,000.

PASSIVE SECURITY

- **Push resistance:** projecting cam.
- **Drill resistance:** hardened steel pin and driver in first position.

KEY ARRANGEMENTS CAPACITY



- 1,800 different cylinders per MK key.

RELIABILITY

- 100,000 cycles (compliant with EN 1303 – Durability 6).

CERTIFICATIONS

- Manufactured in conformity with the parameters of the following standards:
 - EN 1303: grade 6 Durability, grade 3 Security
 - DIN 18254 (ref. DIN EN 1303)

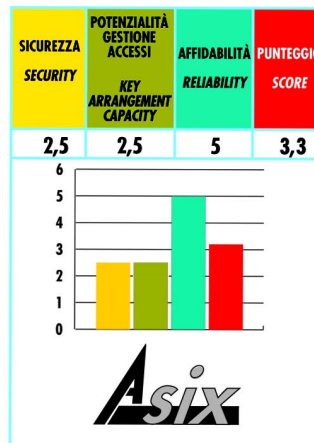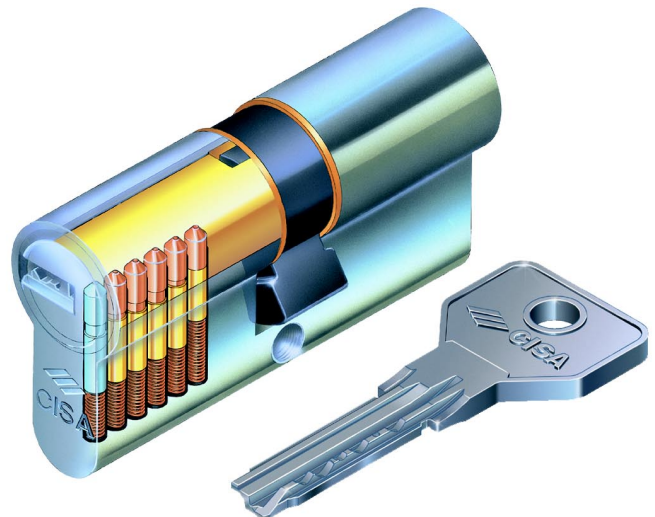

Technical features:

CYLINDER:

- 6 pins key biting system
- brass body
- brass plugs
- self-lubricating sintered steel projecting cam, DIN-compatible
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs

KEY:

- flat reversible keys
- in special brass alloy nickel plated
- 2,9 mm thickness
- 0,48 mm depth
- compatible with protective roses

Finishes:


- Standard: sand brass (fin. 00)
- On request: nickel plated brass (fin. 12)

On request:


- KA, MK, CE, C5 and relevant models

Supplied as standard:

- fixing screw
- 3 keys art 1.00660.01.0




Type	Description	Key item				Kg	Unitweight	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.



• Double cylinder


28 / 28	55,4	27,7	27,7	6	1 00670 01 0	0,216	6	1	OE300	05	0
30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,223	6	1	OE300	07	0
28 / 32	59,2	27,7	31,5	6	1 00670 01 0	0,225	6	1	OE300	08	0
28 / 34	61,2	27,7	33,5	6	1 00670 01 0	0,230	6	1	OE300	06	0
28 / 36	63,2	27,7	35,5	6	1 00670 01 0	0,242	6	1	OE300	09	0
30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,233	6	1	OE300	26	0
33 / 33	65,0	32,5	32,5	6	1 00670 01 0	0,242	6	1	OE300	10	0
35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,267	6	1	OE300	13	0
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,258	6	1	OE300	12	0
28 / 43	70,2	27,7	42,5	6	1 00670 01 0	0,275	6	1	OE300	11	0
30 / 45	74,0	29,5	44,5	6	1 00670 01 0	0,264	6	1	OE300	27	0
35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,264	6	1	OE300	28	0
30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,279	6	1	OE300	17	0
35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,279	6	1	OE300	19	0
40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,279	6	1	OE300	18	0
30 / 55	84,0	29,5	54,5	6	1 00670 01 0	0,294	6	1	OE300	33	0
35 / 50	84,0	34,5	49,5	6	1 00670 01 0	0,294	6	1	OE300	31	0
40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,294	6	1	OE300	30	0
30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,310	6	1	OE300	20	0
35 / 55	89,0	34,5	54,5	6	1 00670 01 0	0,310	6	1	OE300	32	0
40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,310	6	1	OE300	21	0
45 / 45	89,0	44,5	44,5	6	1 00670 01 0	0,310	6	1	OE300	29	0
30 / 65	94,0	29,5	64,5	6	1 00670 01 0	0,324	6	1	OE300	41	0
35 / 60	94,0	34,5	59,5	6	1 00670 01 0	0,324	6	1	OE300	38	0
40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,324	6	1	OE300	42	0
45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,324	6	1	OE300	39	0
30 / 70	99,0	29,5	69,5	6	1 00670 01 0	0,339	6	1	OE300	24	0
35 / 65	99,0	34,5	64,5	6	1 00670 01 0	0,339	6	1	OE300	22	0
40 / 60	99,0	39,5	59,5	6	1 00670 01 0	0,339	6	1	OE300	25	0
45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,339	6	1	OE300	43	0
50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,339	6	1	OE300	23	0
30 / 80	109,0	29,5	79,5	6	1 00670 01 0	0,368	6	1	OE300	37	0
40 / 70	109,0	39,5	69,5	6	1 00670 01 0	0,368	6	1	OE300	35	0
50 / 60	109,0	49,5	59,5	6	1 00670 01 0	0,368	6	1	OE300	36	0
55 / 55	109,0	54,5	54,5	6	1 00670 01 0	0,368	6	1	OE300	70	0
55 / 60	114,0	54,5	59,5	6	1 00670 01 0	0,368	6	1	OE300	71	0



• Half cylinder adjustable cam in 8 position

30 / 10	39,5	29,5	10,0	6	1 00670 01 0	0,164	6	1	OE304	02	0
35 / 10	44,5	34,5	10,0	6	1 00670 01 0	0,179	6	1	OE304	07	0
40 / 10	49,5	39,5	10,0	6	1 00670 01 0	0,195	6	1	OE304	03	0
50 / 10	59,5	49,5	10,0	6	1 00670 01 0	0,222	6	1	OE304	04	0
60 / 10	69,5	59,5	10,0	6	1 00670 01 0	0,252	6	1	OE304	05	0
70 / 10	79,5	69,5	10,0	6	1 00670 01 0	0,282	6	1	OE304	06	0
80 / 10	89,5	79,5	10,0	6	1 00670 01 0	0,312	6	1	OE304	20	0

Type	Description	Key item				Kg	Unitweight	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.



- Double cylinder with thumb turn shaft
- ON REQUEST:
Knob
-art. 1.06353.00
-art. 1.06354.00

30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,239	6	1	OE302 07 0
30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,254	6	1	OE302 26 0
35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,254	6	1	OE302 81 0
30 / 40	69,0	29,5	39,5	6	1 00670 01 0	0,274	6	1	OE302 82 0
35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,274	6	1	OE302 13 0
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,274	6	1	OE302 12 0
35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,289	6	1	OE302 28 0
30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,304	6	1	OE302 17 0
35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,304	6	1	OE302 19 0
40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,304	6	1	OE302 18 0
40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,319	6	1	OE302 30 0
45 / 40	84,0	44,5	39,5	6	1 00670 01 0	0,319	6	1	OE302 84 0
43 / 43	85,0	42,5	42,5	6	1 00670 01 0	0,321	6	1	OE302 46 0
30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,334	6	1	OE302 20 0
40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,334	6	1	OE302 21 0
40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,355	6	1	OE302 42 0
45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,355	6	1	OE302 39 0
45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,365	6	1	OE302 43 0
50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,365	6	1	OE302 23 0
45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,379	6	1	OE302 54 0
55 / 50	104,0	54,5	49,5	6	1 00670 01 0	0,379	6	1	OE302 64 0

Dimensional drawings

