



Technical features:

- Nickel plated satin steel faceplate and striking plate
- Zinc plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel dead-bolt


Supplied as standard:

- Striking plate
- 2 escutcheons : inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:

0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.




- Dead-bolt only
- SUPPLIED AS STANDARD:
Striking plate item 1.06231.00.0



1 00100 00 1

4	-	25	52	1,150	1	1	57010 50 0
4	-	25	60	1,200	1	1	57010 60 0
4	-	25	70	1,250	1	1	57010 70 0




- Dead-bolt only
- Drill resistant plates
- SUPPLIED AS STANDARD:
Striking plate item 1.06231.00.0



1 00101 00 1

4	-	25	52	1,280	1	1	57014 50 0
4	-	25	60	1,330	1	1	57014 60 0
4	-	25	70	1,340	1	1	57014 70 0




- Dead-bolt only
- Pre-arranged for additional locking points
- SUPPLIED AS STANDARD:
Striking plate item 1.06235.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0



1 00100 00 1

4	-	25	60	1,385	1	1	57015 60 0
4	-	25	70	1,430	1	1	57015 70 0



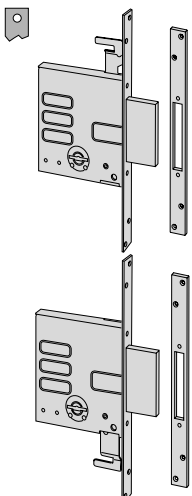

- Dead-bolt only
- Pre-arranged for additional locking points
- Drill resistant plates
- SUPPLIED AS STANDARD:
Striking plate item 1.06235.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0

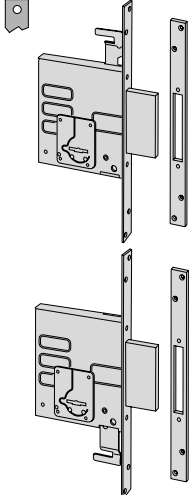





1 00101 00 1



4	-	25	60	1,485	1	1	57019 60 0
4	-	25	70	1,480	1	1	57019 70 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.


	<ul style="list-style-type: none"> • Pair of locks dead-bolt only • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: two strikers item 1.06235.00.0 two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06416.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	-	25	60	2,455	1	1 57020 60 0			
			4	-	25	70	2,540	1	1 57020 70 0			

	<ul style="list-style-type: none"> • Pair of locks dead-bolt only • Drill resistant plates • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: two strikers item 1.06235.00.0 two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06416.00.0 Floor striker item 1.06086.00.0 	 1 00101 00 1	4	-	25	60	2,660	1	1 57024 60 0			
			4	-	25	70	2,760	1	1 57024 70 0			

	<ul style="list-style-type: none"> • Dead-bolt and latch • SUPPLIED AS STANDARD: Striking plate item 1.06271.00.0 	 1 00100 00 1	4	85	25	60	1,475	1	1 57250 60 0			
--	---	---	---	----	----	----	-------	---	--------------	--	--	--

	<ul style="list-style-type: none"> • Dead-bolt and latch • Pre-arranged for additional locking points • SUPPLIED AS STANDARD: Striking plate item 1.06272.00.0 Two guides for extended bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	85	25	60	1,700	1	1 57255 60 0			
--	---	---	---	----	----	----	-------	---	--------------	--	--	--


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.



- Dead-bolt and latch
- Drill resistant plates
- SUPPLIED AS STANDARD:
Striking plate item 1.06271.00.0



4 85 25 60 1,590 1 1 57254 60 0



- Dead-bolt and latch
- Pre-arranged for additional locking points
- Drill resistant plate
- SUPPLIED AS STANDARD:
Striking plate item 1.06272.00.0
Two guides for extended bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
Extended bolts item 1.06415.00.0
Floor striker item 1.06086.00.0



4 85 25 60 1,820 1 1 57259 60 0